



Electric coolers built to go. Powerfully cold, easy to carry, simple to operate and use, and ready for a weekend adventure with family and friends, long solo road trips, or wherever life moves you. Fridge or freezer, the choice is yours. Keeps things as cold as -22 °C without a cube of ice – and monitor and control with a smartphone app.

# DESIGNED FOR EVERY ADVENTURE

This reliable powered cooler allows you to bring more of the food and drink you love, wherever you go. Its robust design is built for tough outdoor use. Featuring a smartphone app to control the interior temperature, ergonomic foldable handles for carrying, and a digital display, this medium powered cooler is perfect for your next weekend adventure.

## Benefits of CFX2 series

- Durable design with reinforced corners, stainless steel hinges & robust removable lid
- Powerful and energy-efficient compressor with variable motor speed
- The temperature can be set between +20 °C and -22 °C
- Digital display for convenient temperature setting with display dim function and USB port
- Protects the vehicle battery from excessive discharging
- Divided interior featuring removable basket for optimal organization



## Temperature control via Wi-Fi app

All CFX2 coolers can be conveniently controlled by smartphone. Our Wi-Fi app gives you plenty of options. You can set different cooling temperatures, battery protection levels, and temperature alarms. Or switch your cooler on and off from a distance.

- Temperature setting via slider or button
- Programming of battery protection levels and temperature alarms
- Display of current temperature, energy source, voltage, and warning messages
- On/Off switch for cooler (or individual compartments of a dual-zone model)



## Seamless temperature control

Digital display for convenient temperature setting with display dim function and USB port.



## Robust construction

Durable design with reinforced corners, stainless steel hinges & robust removable lid.



## Power supply option

Charge small electronics (USB-A).



New



Dometic CFX2 28

Mobile compressor cooler, 28 L

- Provides space for up to 42 × 330 ml cans or 4 × 1.5 l bottles
- The temperature can be set between +20 °C and –22 °C
- Protects the vehicle battery from excessive discharging
- Connects to 12/24 V DC as well as to 100 – 240 V AC
- Dimensions (W × H × D): 600 × 427 × 345 mm

Ref. No: 9620015898

New



Dometic CFX2 45

Mobile compressor cooler, 45 L

- Provides space for up to 56 × 330 ml cans or 8 × 1.5 l bottles
- The temperature can be set between +20 °C and –22 °C
- Protects the vehicle battery from excessive discharging
- Connects to 12/24 V DC as well as to 100 – 240 V AC
- Dimensions (W × H × D): 678 × 493 × 401 mm

Ref. No: 9620015887

New



Dometic CFX2 37

Mobile compressor cooler, 37 L

- Provides space for up to 48 × 330 ml cans or 4 × 1.5 l bottles
- The temperature can be set between +20 °C and –22 °C
- Protects the vehicle battery from excessive discharging
- Connects to 12/24 V DC as well as to 100 – 240 V AC
- Dimensions (W × H × D): 678 × 428 × 401 mm

Ref. No: 9620015888

New



Dometic CFX2 57

Mobile compressor cooler, 57 L

- Provides space for up to 68 × 330 ml cans or 12 × 1.5 l bottles
- The temperature can be set between +20 °C and –22 °C
- Protects the vehicle battery from excessive discharging
- Connects to 12/24 V DC as well as to 100 – 240 V AC
- Dimensions (W × H × D): 709 × 503 × 458 mm

Ref. No: 9620015891



Built-in LED light

Interior lighting for enhanced visibility, even in dark surroundings.



Low energy consumption

Powerful and energy-efficient compressor with variable motor speed.



Easy to carry

Ergonomic foldable handles.



Well-organized interior

Divided interior featuring removable basket for optimal organization.



Easy to clean

The functional drain plug allows for quick and easy clean up.



Intuitive latch

Easy to open with one hand.

Upgrade the experience

The PLB15 Portable Battery is the perfect accessory for one-day boat trips.






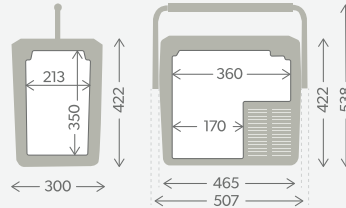
Top view dimensions: 329.4 mm (width), 281.7 mm (depth), 275 mm (height), 90 mm (lid extension), 561.6 mm (total width including lid).

Side view dimensions: 380 mm (height), 235 mm (width), 303.4 mm (depth), 141.2 mm (base width).


<b>Total Volume</b>	13 L	
<b>Provides space for</b>	1 × 1.5 L bottles 20 × 0.33 L cans	
<b>Connections</b>	12 / 24 V DC, 100–240 V AC	
<b>Temperature range</b>	+10 °C to –18 °C	
<b>Power input</b>	48 W	
<b>Insulation</b>	PU foam all around	
<b>System</b>	Fully hermetic compressor with integrated control electronics, low-voltage protection / electronic fuse, automatic reverse pole protection, electronic thermostat	
<b>Refrigerant</b>	R134a: 26 g, CO <sub>2</sub> equivalent: 0.037 t, Global warming potential (GWP): 1430	
<b>Quality Features</b>	<ul style="list-style-type: none"><li>• Energy efficient design provides fast and excellent cooling, even in extremely high outside temperatures</li><li>• Robust, lightweight and compact design ensures excellent portability</li><li>• Removable lid with easy opening latch for convenient cleaning</li><li>• Digital temperature display for convenient setting</li></ul>	
<b>Material</b>	Cabinet: PP + ABS, Lid: PE	
<b>Colour</b>	Pale grey / dark grey	
<b>Weight</b>	9.5 kg	
<b>Test marks</b>	TÜV/GS, E-certified (Automotive EMC Directive)	
<b>Scope of delivery</b>	1 cooler, 1 manual, 1 DC power cord, 1 AC power cord, shoulder strap	
<b>Product</b>	<b>Ref. No.</b>	<b>UK Ref. No.</b>
Dometic CFF 12	9600029485	9620000798



## Mobile Compressor Cooler, 19 L




	<b>Total Volume</b>  <b>Provides space for</b>  <b>Connections</b>  <b>Temperature range</b>  <b>Power input</b>  <b>Insulation</b>  <b>System</b>	19 L  4 × 1.5 L bottles 24 × 0.33 L cans  12 / 24 V DC, 100–240 V AC  +20 °C to –18 °C  46 W  PU foam all around  Fully hermetic compressor with integrated control electronics, low-voltage protection / electronic fuse, automatic reverse pole protection, electronic thermostat
	<b>Refrigerant</b>  <b>Quality Features</b>  <b>Material</b>  <b>Colour</b>  <b>Weight</b>  <b>Test marks</b>  <b>Scope of delivery</b>	R134a: 20 g, CO <sub>2</sub> equivalent: 0.029 t, Global warming potential (GWP): 1430  <ul style="list-style-type: none"> <li>• Powerful and energy-efficient compressor with variable motor speed</li> <li>• Powder-coated metal grid divider allows flexible storage</li> <li>• LED interior light allows easy viewing of the contents even in dark surroundings</li> <li>• Digital display for convenient setting and monitoring of the cooling temperature</li> <li>• Plastic inner lining with rounded edges</li> </ul> Cabinet: PP, Lid: PP + ABS latch, Handle: Metal  Slate / Mist  10.4 kg  TÜV/GS, E-certified (Automotive EMC Directive)  1 cooler, 1 manual, 1 DC power cord, 1 AC power cord
	<b>Product</b>  Dometic CFF 18	<b>Ref. No.</b>  9620001948



## Mobile Compressor Cooler, 21 L

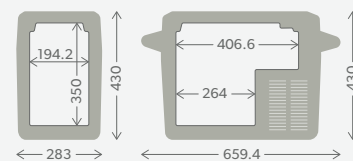

	<b>Total Volume</b> 21 L	<b>Provides space for</b> 6 × 1.5 L bottles 32 × 0.33 L cans	
	<b>Connections</b> 12 / 24 V DC, 100–240 V AC	<b>Temperature range</b> +20 °C to –18 °C	
	<b>Power input</b> 48 W	<b>Insulation</b> PU foam all around	
	<b>System</b> Fully hermetic compressor with integrated control electronics, low-voltage protection / electronic fuse, automatic reverse pole protection, electronic thermostat	<b>Refrigerant</b> R134a: 28 g, CO <sub>2</sub> equivalent: 0.040 t, Global warming potential (GWP): 1430	
	<b>Quality Features</b> <ul style="list-style-type: none"> <li>Energy efficient design provides fast and excellent cooling, even in extremely high outside temperatures</li> <li>Robust, lightweight and compact design ensures excellent portability</li> <li>Removable lid with easy opening latch for convenient cleaning</li> <li>Digital temperature display for convenient setting</li> </ul>		
	<b>Material</b> Cabinet: PP + ABS, Lid: PE	<b>Colour</b> Pale grey / dark grey	
	<b>Weight</b> 9.5 kg	<b>Test marks</b> TÜV/GS, E-certified (Automotive EMC Directive)	
	<b>Scope of delivery</b> 1 cooler, 1 connection cable for 12/24 V DC connection, 1 connection cable for 100–240 V AC connection, 2 carrying handles, 1 manual		
	<b>Product</b> Dometic CFF 20	<b>Ref. No.</b> 9600028325	<b>UK Ref. No.</b> 9600028326

Portable compressor cooler, 34 L





	<b>Total Volume</b>	34 L
	<b>Provides space for</b>	8 × 1.5 L bottles 54 × 0.33 L cans
	<b>Connections</b>	12 / 24 V DC, 100–240 V AC
	<b>Temperature range</b>	+20 °C to –18 °C
	<b>Power input</b>	53 W
<b>Insulation</b>	<b>System</b>	PU foam all around Fully hermetic compressor with integrated control electronics, low-voltage protection / electronic fuse, automatic reverse pole protection, electronic thermostat
<b>Refrigerant</b>	<b>Quality Features</b>	R134a: 40 g, CO <sub>2</sub> equivalent: 0.057 t, Global warming potential (GWP): 1430 <ul style="list-style-type: none"> <li>Energy efficient design provides fast and excellent cooling, even in extremely high outside temperatures</li> <li>Double sided opening lid</li> <li>Compact design ensures excellent portability</li> </ul>
<b>Material</b>	<b>Colour</b>	Cabinet: PP + ABS, Lid: PE Pale grey / dark grey
<b>Weight</b>	<b>Test marks</b>	17.2 kg TÜV/GS, E-certified (Automotive EMC Directive)
<b>Scope of delivery</b>	<b>Product</b>	1 cooler, 1 connection cable for 12/24 V DC connection, 1 connection cable for 100–240 V AC connection, 2 carrying handles, 1 removable wire basket, 1 manual
<b>Ref. No.</b>	<b>UK Ref. No.</b>	9600024842 9600026458



Dometic CFF 45

Portable compressor cooler, 44 L





  	<b>Total Volume</b>	44 L	
	<b>Provides space for</b>	11 × 1.5 L bottles 75 × 0.33 L cans	
	<b>Connections</b>	12 / 24 V DC, 100–240 V AC	
	<b>Temperature range</b>	+20 °C to –18 °C	
	<b>Power input</b>	53 W	
	<b>Insulation</b>	PU foam all around	
	<b>System</b>	Fully hermetic compressor with integrated control electronics, low-voltage protection / electronic fuse, automatic reverse pole protection, electronic thermostat	
	<b>Refrigerant</b>	R134a: 50 g, CO <sub>2</sub> equivalent: 0.072 t, Global warming potential (GWP): 1430	
	<b>Quality Features</b>	<ul style="list-style-type: none"><li>• Energy efficient design provides fast and excellent cooling, even in extremely high outside temperatures</li><li>• Double sided opening lid</li><li>• Compact design ensures excellent portability</li></ul>	
	<b>Material</b>	Cabinet: PP + ABS, Lid: PE	
	<b>Colour</b>	Pale grey / dark grey	
	<b>Weight</b>	18.6 kg	
	<b>Test marks</b>	TÜV/GS, E-certified (Automotive EMC Directive)	
	<b>Scope of delivery</b>	1 cooler, 1 connection cable for 12/24 V DC connection, 1 connection cable for 100–240 V AC connection, 2 carrying handles, 1 removable wire basket, 1 manual	
<b>Product</b>		<b>Ref. No.</b>	<b>UK Ref. No.</b>
Dometic CFF 45		9600012977	9600026459

Dometic CFF 70DZ

Mobile Dual-Zone Compressor Cooler, 70 L




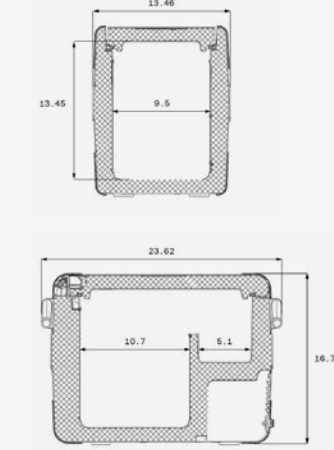
  	<b>Total Volume</b>	70 L (30 / 40 L)	
	<b>Provides space for</b>	17 × 1.5 l bottles 114 × 0.33 l cans	
	<b>Connections</b>	12 / 24 V DC, 100–240 V AC	
	<b>Temperature range</b>	+20 °C to –18 °C	
	<b>Power input</b>	53 W	
	<b>Insulation</b>	PU foam all around	
	<b>System</b>	Fully hermetic compressor with integrated control electronics, low-voltage protection / electronic fuse, automatic reverse pole protection, electronic thermostat	
	<b>Refrigerant</b>	R134a: 34 g, CO <sub>2</sub> equivalent: 0.049 t, Global warming potential (GWP): 1430	
	<b>Quality Features</b>	<ul style="list-style-type: none"><li>• Dual storage compartments allow independently variable temperature control</li><li>• Generous insulation and effective temperature distribution for excellent cooling performance and energy efficiency</li><li>• Robust construction for outdoor use</li><li>• 3-stage dynamic battery protection system prevents dead car battery or allows deep draw on dual batteries</li></ul>	
	<b>Material</b>	Cabinet: PP + ABS, Lid: PE	
	<b>Colour</b>	Pale grey / dark grey	
	<b>Weight</b>	26 kg	
	<b>Test marks</b>	TÜV/GS, E-certified (Automotive EMC Directive)	
	<b>Scope of delivery</b>	1 cooler, 1 connection cable for 12/24 V DC connection, 1 connection cable for 100–240 V AC connection, 2 carrying handles, 2 removable wire baskets, 1 manual	
<b>Product</b>		<b>Ref. No.</b>	<b>UK Ref. No.</b>
Dometic CFF 70DZ		9600028329	9600028330



Dometic CFX2 25

Mobile Compressor Cooler, 28 L






  	<b>Total volume</b>	28 L
	<b>Provides space for</b>	4 × 1.5 L bottles 42 × 330 ml cans
	<b>Connections</b>	12 / 24 VDC, 100–240 V AC
	<b>Temperature range</b>	+20 °C to –22 °C
	<b>Power input</b>	42 W
	<b>Insulation</b>	PU (Polyurethane)
	<b>System</b>	Fully hermetic compressor with integrated control electronics, low-voltage protection / electronic fuse, automatic reverse pole protection, electronic thermostat
	<b>Refrigerant</b>	R600a: 13 g, CO <sub>2</sub> equivalent: 0 t, Global warming potential (GWP): 0
	<b>Quality features</b>	<ul style="list-style-type: none"><li>• CFX2 app allows temperature control via Bluetooth or wireless network and provides performance history</li><li>• Powerful VMSO3 controlled compressor enables optimum power consumption</li><li>• Heavy-duty yet lightweight construction, fender frame protected edges and fully insulated lid with aluminium hinges</li><li>• Built-in TFT user interface displays operating status</li></ul>
	<b>Material</b>	Lid, Top case & Vent cover: Standard PP; Bottom case: PP (5VA); Center hoop: ABS (5VA)
	<b>Colour</b>	Ocean
	<b>Weight</b>	13.30 kg
	<b>Test marks</b>	TÜV/GS, E-certified (Automotive EMC Directive)
	<b>Scope of delivery</b>	1 cooler, 1 manual, 1 cable for DC 12/24V connection, 1 cable for AC 100–240V connection, removable wire baskets
<b>Product</b>		<b>Ref. No.</b>
Dometic CFX2 25		9620015898



Dometic CFX2 37

Mobile compressor cooler, 37 L






  	<b>Total volume</b>	37 L
	<b>Provides space for</b>	4 × 1.5 L bottles 48 × 330 ml cans
	<b>Connections</b>	12 / 24 V DC, 100–240 V AC
	<b>Temperature range</b>	+20 °C to –22 °C
	<b>Power input</b>	43 W
	<b>Insulation</b>	PU (Polyurethane)
	<b>System</b>	Fully hermetic compressor with integrated control electronics, low-voltage protection / electronic fuse, automatic reverse pole protection, electronic thermostat
	<b>Refrigerant</b>	R600a: 13 g, CO <sub>2</sub> equivalent: 0 t, Global warming potential (GWP): 0
	<b>Quality features</b>	<ul style="list-style-type: none"><li>• CFX2 app allows temperature control via Bluetooth or wireless network and provides performance history</li><li>• Powerful VMSO3 controlled compressor enables optimum power consumption</li><li>• Heavy-duty yet lightweight construction, fender frame protected edges and fully insulated lid with aluminium hinges</li><li>• Built-in TFT user interface displays operating status</li></ul>
	<b>Material</b>	Lid, Top case & Vent cover: Standard PP; Bottom case: PP (5VA); Center hoop: ABS (5VA)
<b>Colour</b>		Ocean
<b>Weight</b>		15.60 kg
<b>Test marks</b>		TÜV/GS, E-certified (Automotive EMC Directive)
<b>Scope of delivery</b>		1 cooler, 1 manual, 1 cable for DC 12/24V connection, 1 cable for AC 100–240V connection, removable wire baskets
<b>Product</b>		<b>Ref. No.</b>
Dometic CFX2 37		9620015888



Dometic CFX2 45

Mobile Compressor Cooler, 45 L






  	<b>Total volume</b>	45 L
	<b>Provides space for</b>	8 × 1.5 L bottles 56 × 330 ml cans
	<b>Connections</b>	12/24 V DC, 100–240 V AC
	<b>Temperature range</b>	+20 °C to –22 °C
	<b>Power input</b>	41 W
	<b>Insulation</b>	PU (Polyurethane)
	<b>System</b>	See CFX2 37, p. 38
	<b>Refrigerant</b>	R600a: 14 g, CO <sub>2</sub> equivalent: 0 t, Global warming potential (GWP): 0
	<b>Quality features</b>	See CFX2 37, p. 38
	<b>Material</b>	Lid, Top case & Vent cover: Standard PP; Bottom case: PP (5VA); Center hoop: ABS (5VA)
<b>Colour</b>		Ocean
<b>Weight</b>		16.60 kg
<b>Test marks</b>		TÜV/GS, E-certified (Automotive EMC Directive)
<b>Scope of delivery</b>		1 cooler, 1 manual, 1 cable for DC 12/24V connection, 1 cable for AC 100–240V connection, removable wire baskets
<b>Product</b>		<b>Ref. No.</b>
Dometic CFX2 45		9620015887

Dometic CFX2 57

Mobile Compressor Cooler, 57 L



  	<b>Total volume</b>	57 L
	<b>Provides space for</b>	12 × 1.5 L bottles 68 × 330 ml cans
	<b>Connections</b>	12/24 V DC, 100–240 V AC
	<b>Temperature range</b>	+20 °C to –22 °C
	<b>Power input</b>	46 W
	<b>Insulation</b>	PU (Polyurethane)
	<b>System</b>	See CFX2 37, p. 38
	<b>Refrigerant</b>	R600a: 17 g, CO <sub>2</sub> equivalent: 0 t, Global warming potential (GWP): 0
	<b>Quality features</b>	See CFX2 37, p. 38
	<b>Material</b>	Lid, Top case & Vent cover: Standard PP; Bottom case: PP (5VA); Center hoop: ABS (5VA)
<b>Colour</b>		Ocean
<b>Weight</b>		18.30 kg
<b>Test marks</b>		TÜV/GS, E-certified (Automotive EMC Directive)
<b>Scope of delivery</b>		1 cooler, 1 manual, 1 cable for DC 12/24V connection, 1 cable for AC 100–240V connection, removable wire baskets
<b>Product</b>		<b>Ref. No.</b>
Dometic CFX2 57		9620015891