



TROPICOOL

HIGH-TECH FOOD COOLER AND WARMER

DOMETIC TROPICOOL TCX 14

Thermoelectric cooler with TC special electronics

<p>450</p> <p>323</p> <p>1,5/2L</p> <p>250</p> <p>303</p> <p>328</p> <p>208</p> <p>260</p> <p>201</p>	Total volume	approx. 14 litres	
	Connection voltage	12/24 volts DC and 230 volts AC	
	Power consumption	approx. 46 watts at 12 volts DC; approx. 50 watts at 24 volts DC; approx. 64 watts at 230 volts	
	Energy class	A++	
	Temperature range	Cooling: +1 °C to +15 °C (up to 27 °C below the ambient temperature); heating: +50 °C to +65 °C	
	Insulation	PU full foam insulation	
	System	Wear-free thermoelectrics (Peltier system), cold transmission to the interior by dynamically ventilated aluminium heat exchanger, heat dissipation to the outside by high-performance heat exchanger and brushless, no wear and tear on the fan	
	Material	Sturdy, injection moulded parts	
	Colour	Dark grey/pale grey	
	Weight	approx. 5.0 kg	
Quality features	TC special electronics: 7-stage electronic thermostat with LED indicators, memory function, ON/OFF and cold/warm option activated with soft-touch operating panel, intelligent powersave circuit. Integrated mains supply unit with priority circuit, outstanding cooling performance, with active battery protection, reverse polarity protection, magnetic switch to deactivate the interior fan when the box is opened, detachable lid with magnetic closure, sturdy, fold-away handle		
Test marks	TÜV/GS, e-approved (Automotive EMC Directive)		
Product	Ref. No.	Ref. No. UK	
Dometic TropiCool TCX 14*	9103540486	9600010637	
/ Optional extras			
Universal fixing kit	9105303709		


UNIVERSAL FIXING KIT

For TropiCool TCX 14, TCX 21, TCX 35: For fastening of TropiCool coolers in vehicles.

	Material	Powder-coated metal	
	Colour	Black	
	Scope of delivery	Two base plates, two adjustable straps, set of screws	
	Product	Ref. No.	
Universal fixing kit	9105303709		

DOMETIC TROPICOOOL TCX 21


Thermoelectric cooler with TC special electronics

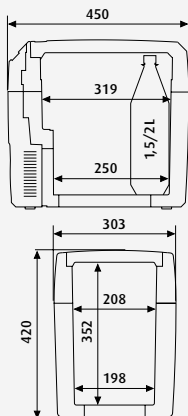

Total volume	approx. 20 litres	
Connection voltage	12/24 volts DC and 230 volts AC	
Power consumption	approx. 46 watts at 12 volts DC; approx. 50 watts at 24 volts DC approx. 64 watts at 230 volts	
Energy class	A++	
Temperature range	Cooling: +1 °C to +15 °C (up to 27 °C below the ambient temperature); heating: +50 °C to +65 °C	
Insulation	PU full foam insulation	
System	See TCX 14	
Material	Sturdy, injection moulded parts	
Colour	Dark grey/pale grey	
Weight	approx. 6.0 kg	
Quality features	TC special electronics: 7-stage electronic thermostat with LED indicators, memory function, ON/OFF and cold/warm option activated with soft-touch operating panel, intelligent powersave circuit. Integrated mains supply unit with priority circuit, outstanding cooling performance, with active battery protection, reverse polarity protection, magnetic switch to deactivate the interior fan when the box is opened, detachable lid with magnetic closure, sturdy, fold-away handle, vertical space for 2 litre bottles, adjustable grid divider	
Test marks	TÜV/GS, e-approved (Automotive EMC Directive)	
Product	Ref. No.	Ref. No. UK
Dometic TropiCool TCX 21*	9103540487	9600010638
/ Optional extras		
Universal fixing kit	9105303709	

DOMETIC TROPICOOOL TCX 35

Thermoelectric cooler with TC special electronics

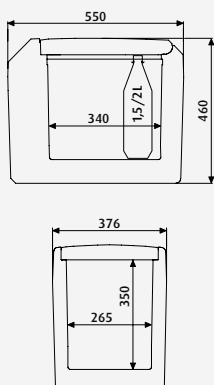

Total volume	approx. 33 litres	
Connection voltage	12/24 volts DC and 230 volts AC	
Power consumption	approx. 46 watts at 12 volts DC; approx. 50 watts at 24 volts DC approx. 64 watts at 230 volts	
Energy class	A++	
Temperature range	Cooling: +1 °C to +15 °C (up to 27 °C below the ambient temperature); heating: +50 °C to +65 °C	
Insulation	PU full foam insulation	
System	See TCX 14	
Material	Sturdy, injection moulded parts	
Colour	Dark grey/pale grey	
Weight	approx. 10.0 kg	
Quality features	TC special electronics: 7-stage electronic thermostat with LED indicators, memory function, ON/OFF and cold/warm option activated with soft-touch operating panel, intelligent powersave circuit. Integrated mains supply unit with priority circuit, outstanding cooling performance, with active battery protection, reverse polarity protection, magnetic switch to deactivate the interior fan when the box is opened, detachable lid with snap lock closure, handy carrying grips, vertical space for 2-litre bottles, adjustable grid divider	
Test marks	TÜV/GS, e-approved (Automotive EMC Directive)	
Product	Ref. No.	Ref. No. UK
Dometic TropiCool TCX 35*	9103540488	9600010639
/ Optional extras		
Universal fixing kit	9105303709	